

## **BLUEPRINT NORTH LINDEN 1, ARTANE/PARKWOOD LATERAL LINING**


This project will rehabilitate approximate 489 sanitary sewer service laterals in the project area via “trenchless” methods using cured-in-place pipe (CIPP) technology. The project is approximately bounded by Denune on the north, Parkwood on the east, Hudson on the South, and Cleveland on the west.

The goal of this project is to reduce stormwater from entering the sanitary sewer system through leaky joints and cracks in lateral pipes. Construction is expected to begin in first quarter of 2022, and be complete by third quarter, 2023. Each impacted resident will receive written notification from the City’s contractor prior of the lateral rehabilitation. The notifications will give specific information on the timing of the work, contact information, and a request to restrict water usage for a short period of time (4 hours) while the lateral is being lined.

Financing for this project is being provided through the Ohio Environmental Protection Agency’s Water Pollution Control Loan Fund Program with a below market-rate loan. Prior to granting this loan, the Ohio EPA required a detailed submittal from the Division of Sewerage and Drainage to determine the project’s eligibility.


For additional information please contact the Blueprint Office at (614) 645-1253, or e-mail: [blueprint@columbus.gov](mailto:blueprint@columbus.gov).

# Artane/Parkwood Lateral Lining Project Area

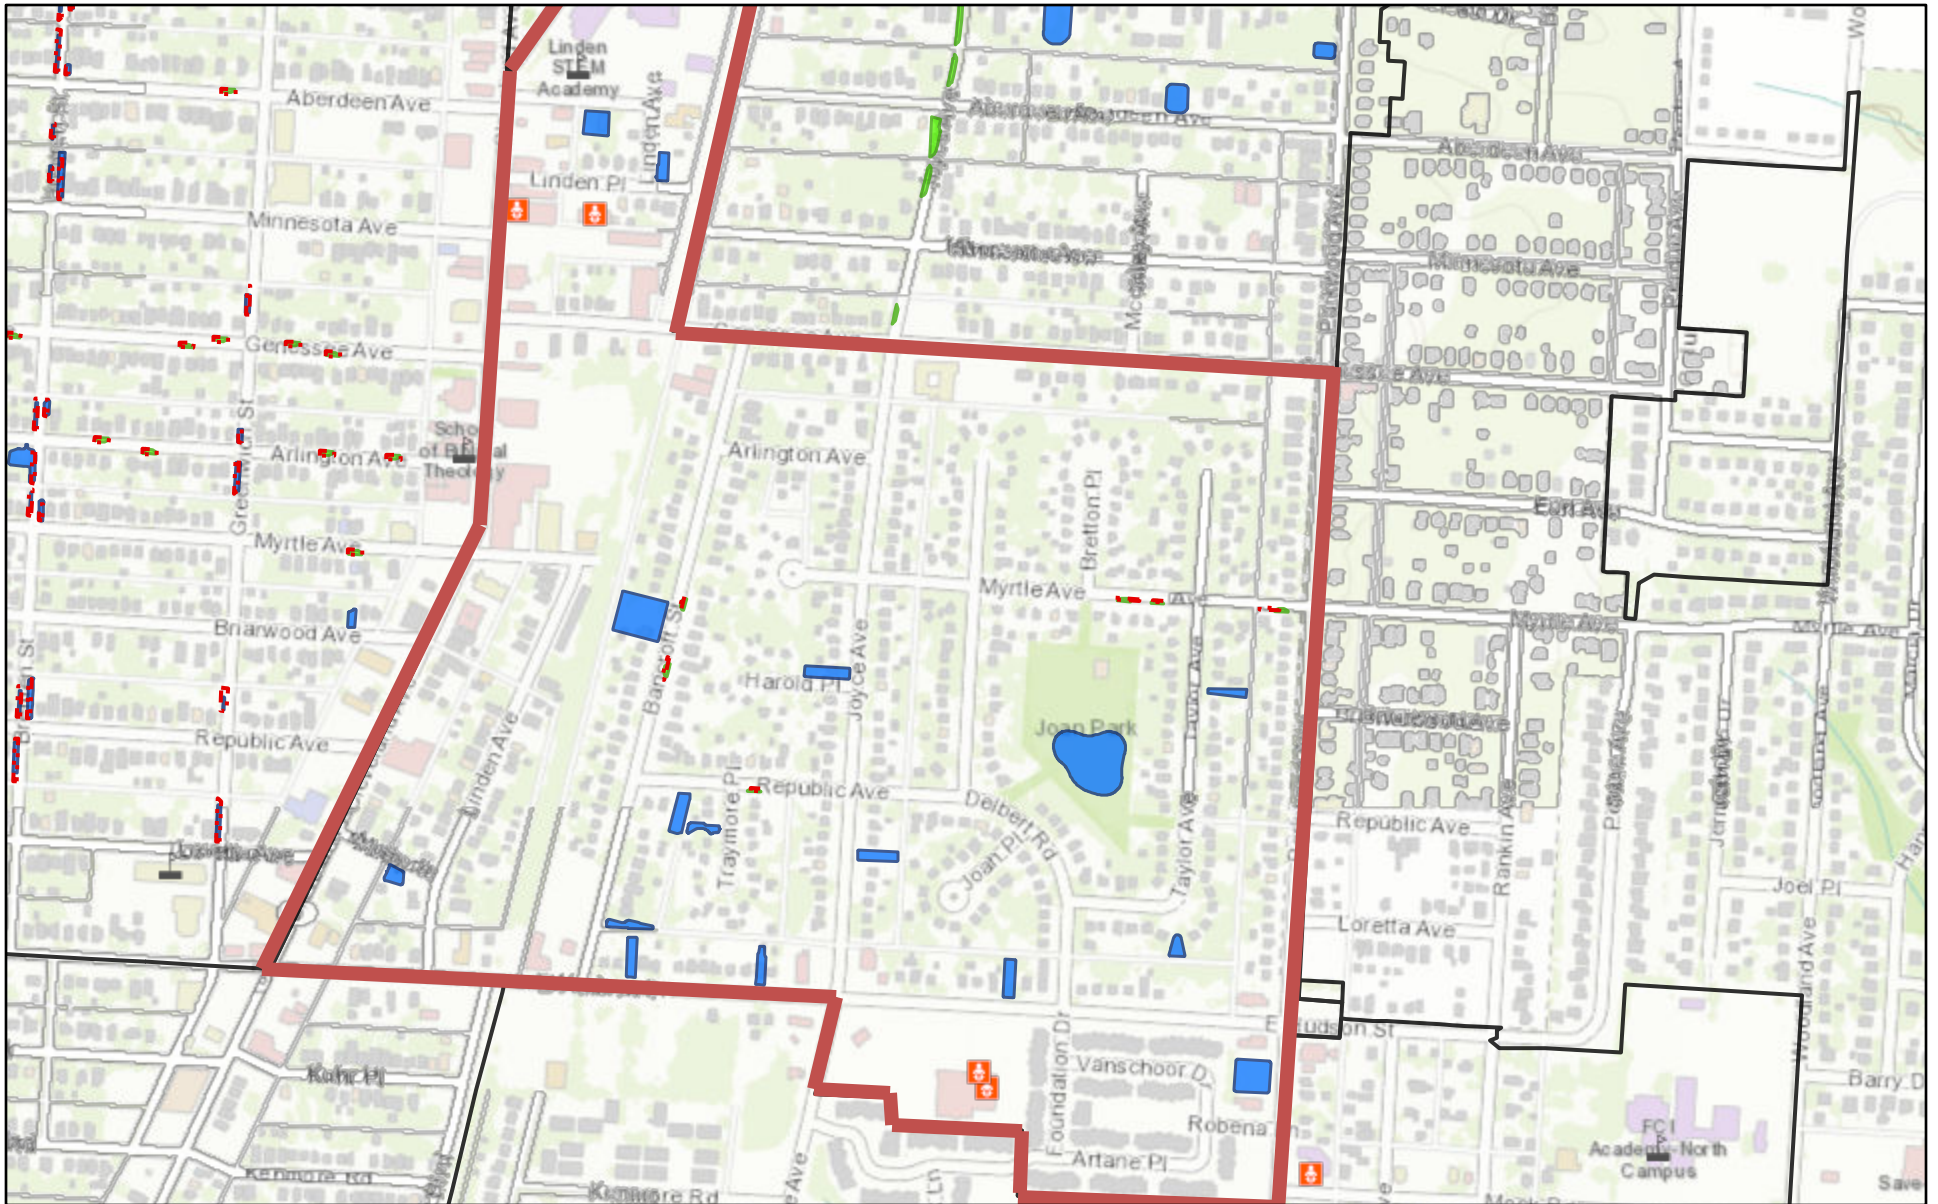

9/15/2021, 12:26:33 PM

1:9,028



Franklin County Auditor, Esri, HERE, Garmin, INCREMENT P, Intermap,

City of Columbus Ohio  
Franklin County Auditor, Esri, HERE, Garmin, INCREMENT P, Intermap, USGS, METI/NASA, EPA, USDA |